
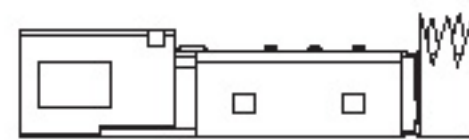

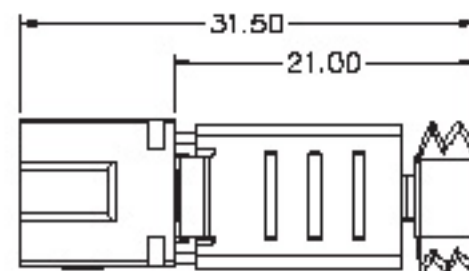


SPECIFICATION:

Current Rating : 1.5 A
 Voltage :30V
 Dielectric Withstand:100V DC
 Insulation Resistance: 1000 Megohms Min
 Contact Resistance :50 Milliohms Max.
 Shell Resistance:50 Megohms
 Operating Temperature : -40°C To +85°C
 Storage Temperature : -40°C To +105°C



MERITEC
<http://www.meritec.co.kr>

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
IEC 1384b		MPT		.X ±0.15	
PART No. TW09P5		CHECKED BY		.2X ±0.10	
DRAWING No. TW09P5		LHC		.3X ±0.05	
DRAWING BY		HPT		UNIT	
SCALE	MM	RFY.	A	MM	

APR	REVISIONS	CHK	DATT