
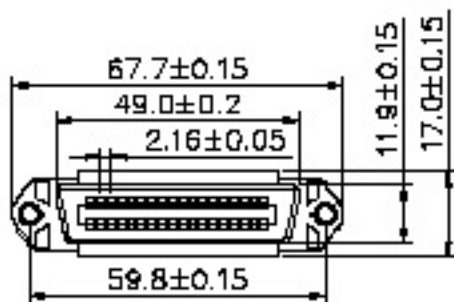



SPECIFICATIONS :
 Current Rating : 3A
 Dielectric Strength : 500V AC For 1 Minute
 Insulator Resistance : 500 Megohms Min.
 At DC 500V
 Temperature Rating : -25°C To +105°C
 Shell : Steel Silver
 Contact : Brass, Gold Plated Over Nickel
 Insulator : PBT Glass Fibre Reinforced UL B4V-D

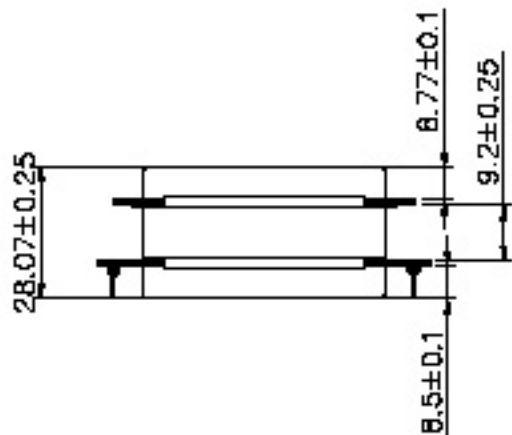

Pin Out : 36 Male 36 Female

1	-----	1
2	-----	2
3	-----	3
4	-----	4

35	-----	35
36	-----	36
G	-----	G

MERITEC

<http://www.meritec.co.kr>

CATEGORY Adaptor Clip Type		APPROVED BY MCI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.20 .XX ±0.15 .XXX ±0.05
PART No. ACC3636FS		CHECKED BY RAN		
DRAWING No. ACC3636FS		DRAWING BY LKH		
SCALE	NONE	REV.	A	UNIT mm

ART A	REVISIONS	CHK	DATT
-------	-----------	-----	------