
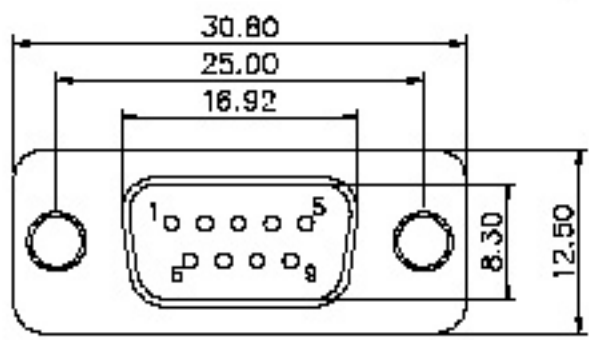


**SPECIFICATIONS :**  
 Current Rating : 5 AMP  
 Dielectric Strength : 1000V For One Minute  
 Insulation Resistance : 1000 Megohms Min At 500V DC  
 Temperature : -55°C To +105°C  
 Shell: Steel, Zinc Plated Or Tin Plated  
 Pin Contact : Gold Plated Over Nickel  
 Insulator: PBT Glass Fibre Reinforced  
 UL 94V-0  
 Packing: Tray

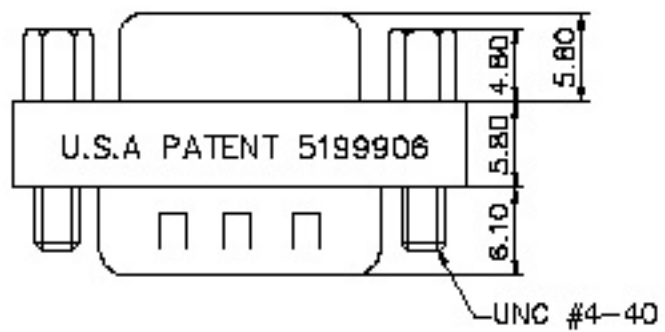

**MERITEC**  
<http://www.meritec.co.kr>

CATEGORY Adapter Slim Type		APPROVED BY GFNIUS		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
PART No. ADD0909F5		CHECKED BY MFI		.K ±0.30					
DRAWING No. ADD0909E5		DRAWING BY H2T		.XX ±0.25					
SCALE NONE		RFY.	A	UNIT MM		AR/A	REVISIONS	CHK	DATT