File No. 438 SHEET 1 /1

SPECIFICATIONS

Rating: DC 50V 1.0A
Contact Resistance: 30 Milliohms Max.
Insulation Resistance: 100 Megohms Min. (DC 250V)
Withstand Voltage: 500V AC
Insertion And Extraction Force: 5–35N
Life Test: 1000 Cycles

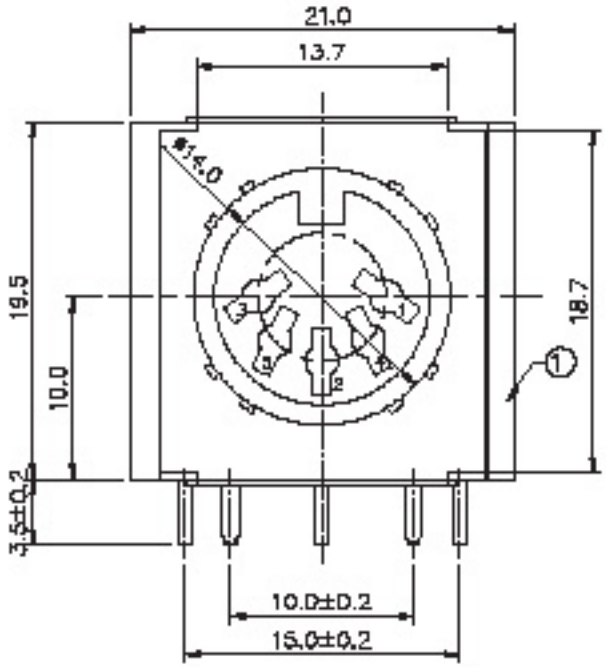

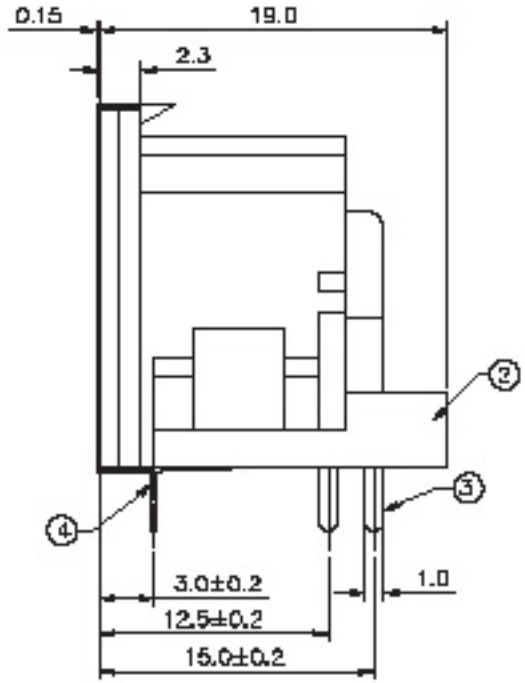

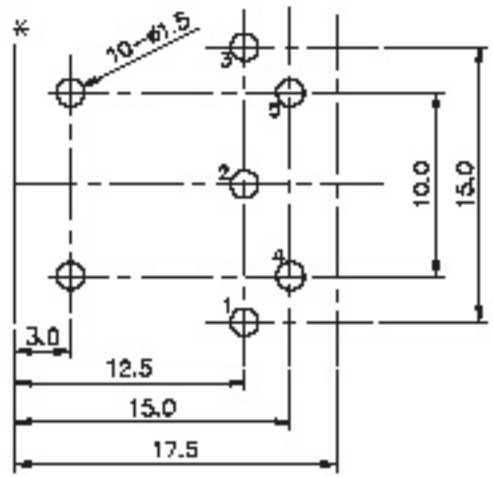

P.C.B Layout
Top View

No.	Description	Q'ty	Material	Plating
4	Contact Foot	1	Bronze	Ni–Plating
3	Contact Foot	5	Bronze	Ag–Plating
2	Cover	1	PBT	
1	Housing	1	PBT	

MERITEC
http://www.meritec.co.kr

CATEGORY		APPROVED BY	WFI
PART No.	DJ05M	CHECKED BY	BECKY
DRAWING No.	DJ05M	DRAWING BY	H7F
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
0.0~<10.0 ±0.10
10.0~<20.0 ±0.15
20.0~<30.0 ±0.20
ANG. ±1.5°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
	A0	NEW RELEASE	BECKY	03/06/2006