File No. 060 SHEET 1 / 1

SPECIFICATIONS

Rating:100V DC 1A Max.
Dielectric Strength:250V AC/1 Min.
Insulation Resistance:100Megohms Min.At 500V DC
A)Boot:PVC
B)Metal Port:Steel,Nickel Plated
C)Insulator:PBT
D)Pin Contact:Brass Nickel Plated

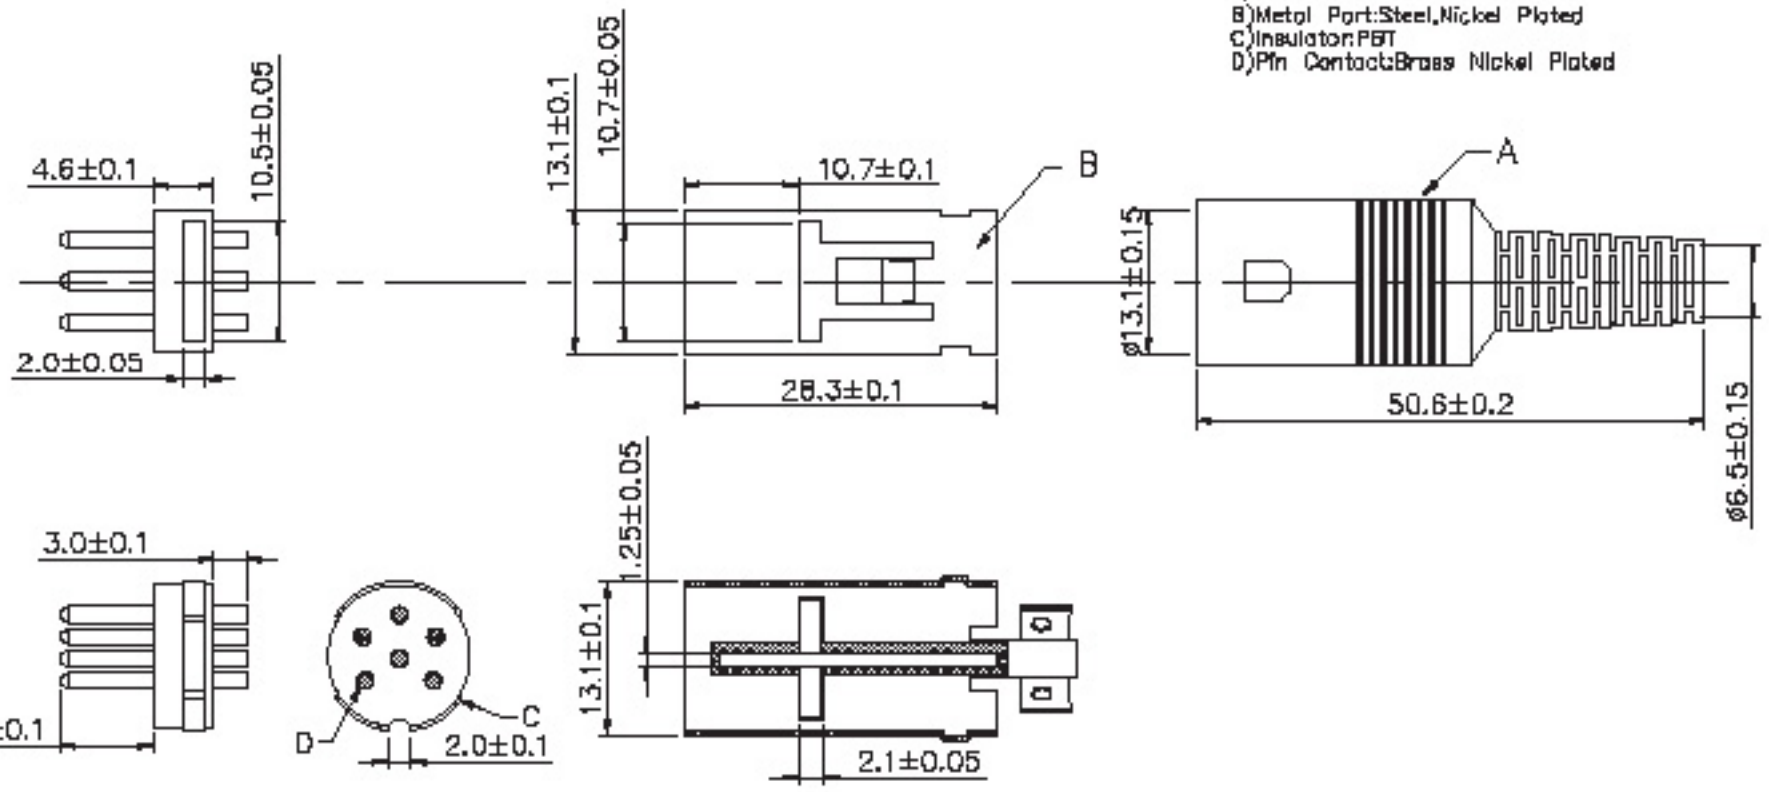

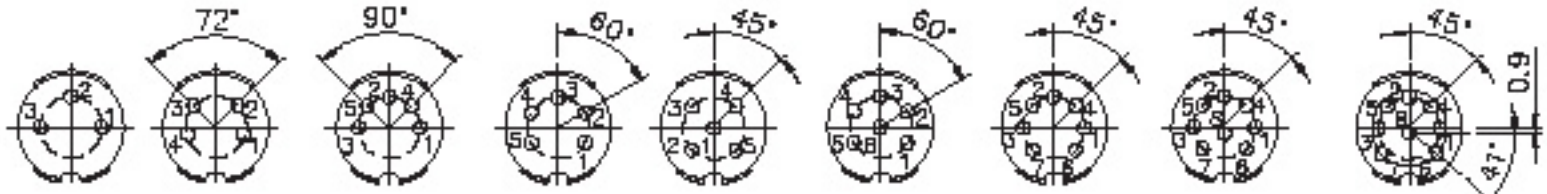

3P 180° 4P 210° 5P 180° 5P 240° 5P 360° 6P 240° 7P 270° 8P 270° 8P 262°

MERITEC
http://www.meritec.co.kr

CATEGORY		APPROVED BY	MCI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
PART No.	DAXXP	CHECKED BY	RAN	.X ±0.1	
DRAWING No.	DAXXP	DRAWING BY	LXH	.XX ±0.05	
SCALE	NONE	REV.	B0	ANGLE	
				UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
⚠	B0	NEW RELEASE	HJT	05/03/2007