File No. 487 SHEET 1 /1

SPECIFICATIONS

Current Rating:1.5A
Voltage Rating:40V
Contact Resistance:30Milliohms Max
Insulation Resistance:1000Megohms Min 500V DC
Dielectric Withstanding Voltage:500V AC
Operating Temperature:-20°C~+80°C
Body&Latch:NYB6 Rated.
Contacts:Phosphor Bronze
Gold Flash Over Nickel
Shell:Zinc Alloy
Rivet:Brass

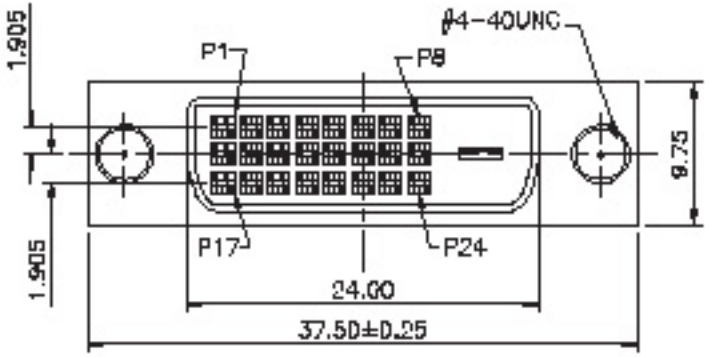

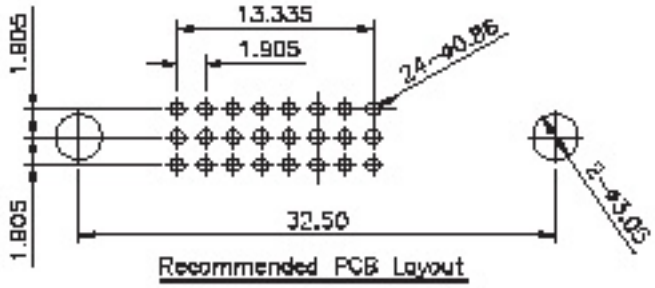

Recommended PCB Layout

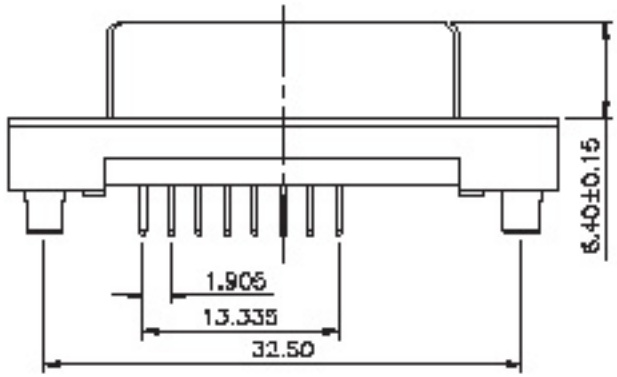

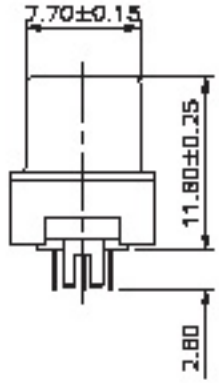

MERITEC
http://www.meritec.co.kr

CATEGORY		APPROVED BY	MFI
PART No. ⚠ DVI24+1SDN-ZN		CHECKED BY	HZT
DRAWING No. ⚠ DVI24+1SDN-ZN		DRAWING BY	PFGA
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.35 .X° ±3°
.XX ±0.20 .XX° ±1°
.XXX ±0.10 .XXX° ±0.5°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	A1	CHANGE P/N DVI24+1SD-ZN TO DVI24+1SDN-ZN	MFI	04/10/2007
⚠	A0	NEW RELEASE	HZT	11/08/2006