


SPECIFICATIONS

Current Rating: 3Amp
 Dielectric Strength: 1000V AC For 1 Minute
 Insulator Resistance: 5000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operation Temperature: -55°C ~ +105°C
 Insertion Force: <5kg
 Extraction Force: >1.5kg
 Insulator: PC
 Contact: Brass, 0.3t, Tin Plated

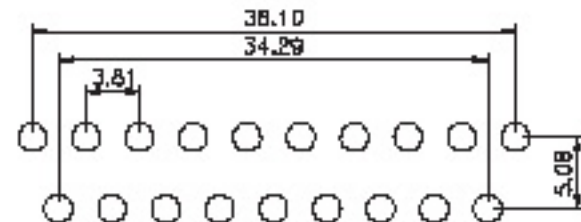

Recommend P.C.B. Layout

MERITEC
<http://www.meritec.co.kr>

CATEGORY Sort 91 Way Jack		APPROVED BY MFI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
PART No. SC21500X		CHECKED BY BECKY		.X ±0.3					
DRAWING No. SC21500X		DRAWING BY H7F		.3X ±0.20					
SCALE NDF		REV. AD		ANG. ±					
UNIT MM						AD	NEW RELEASE	BECKY	2004/08/18
						NO. REV.	REVISIONS	CHK	DATF