
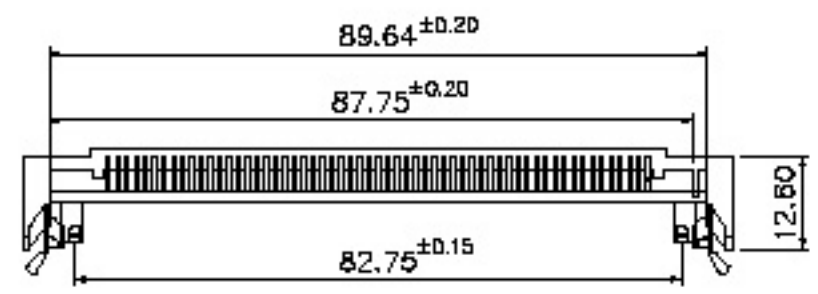
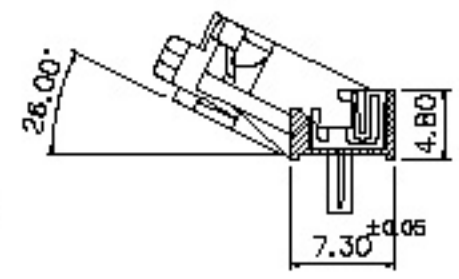


P.C.B. Layout

**SPECIFICATIONS**  
 Contact Rating: 1Amp  
 Contact Resistance: 30 Milliohms Max.  
 Insulation Resistance: 1000 Megohms At 500 DC  
 Dielectric Strength Voltage : 1000V AC  
 For One Minute(2.54mm Pitch)  
 Operating And storage Temperature: -40°C To +100°C  
 Durability : 30 Cycles Min.  
 Capacitance: 1PF Max.  
 Contact Force: 40 Grams Min.  
 Insertion Force : 0 Grams  
 Body Material: Liquid Crystal Polymer UL 94V-0  
 Contact Material: Phosphor Bronze  
 Contact Plating: Tin Plated Over Nickel  
 Recommended Industry Standard Modules  
 (1.19mm To 1.37mm Thkck)

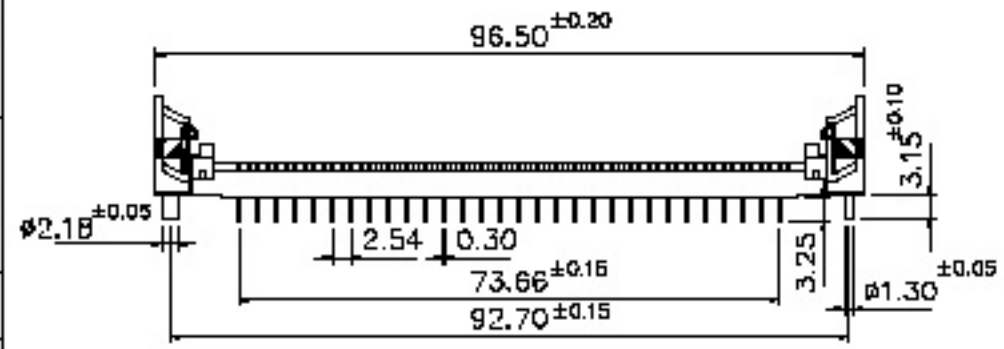

**MERITEC**

<http://www.meritec.co.kr>

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.15 .XX ±0.10 .XXX ±0.05					
SUM		MO							
PART No.	SUM1W3DA	CHECKED BY	RAN						
DRAWING No.	SUM1W3DA	DRAWING BY	MPF	UNIT	mm				
SCALE	NONE	RFY.	A			AR/A	REVISIONS	CHK	DATT